

# SMD Low Profile High Current Molded Inductor Size 1350

Capable of corresponding high frequency .  
Low loss realized with low DCR.  
High performance (Isat) realized by metal dust core.


100% Lead(Pb)-Free and RoHS compliant.




HVAC

Audio subsystem  
Digital instrument cluster

## Dimensions: [mm]

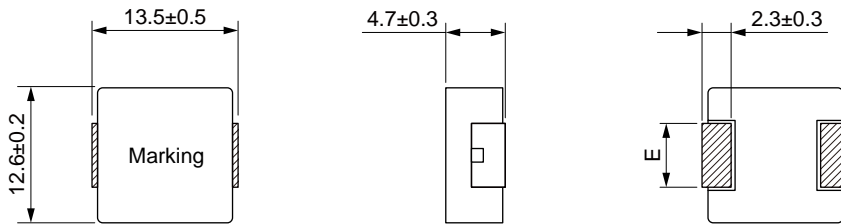


## Land Pattern: [mm]










## Electrical Properties:


Part Number	DCR [mΩ]	DCR Tolerance	Isat [A]	Isat Tolerance	Inductance [mH]	Inductance Tolerance	Height [mm]	Weight [mg]	Lead Length [mm]
MDA1350-R22M	0.22	±20%	55.0	50.0	65.0	60.0	0.50	0.61	4.0±0.3
MDA1350-R33M	0.33	±20%	42.0	37.0	65.0	59.0	0.65	0.80	4.0±0.3
MDA1350-R47M	0.47	±20%	38.0	34.0	65.0	58.0	0.77	0.90	4.0±0.3
MDA1350-R68M	0.68	±20%	34.0	31.0	50.0	42.0	1.30	1.55	4.0±0.3
MDA1350-1R0M	1.00	±20%	30.0	27.0	40.0	34.0	1.60	1.90	4.0±0.3
MDA1350-1R5M	1.50	±20%	25.0	22.0	31.0	28.0	3.20	3.80	4.7±0.3
MDA1350-2R2M	2.20	±20%	17.0	15.5	26.0	23.0	4.10	4.80	4.7±0.3
MDA1350-3R3M	3.30	±20%	15.5	14.0	23.0	20.5	6.00	7.00	4.7±0.3
MDA1350-4R7M	4.70	±20%	14.0	12.5	18.5	16.0	8.80	10.2	4.7±0.3
MDA1350-6R8M	6.80	±20%	12.0	11.0	16.5	15.0	13.0	16.0	4.7±0.3
MDA1350-100M	10.0	±20%	10.0	9.0	13.0	10.5	19.2	22.0	4.7±0.3
MDA1350-150M	15.0	±20%	9.40	8.2	11.0	9.2	30.0	36.0	4.7±0.3

Typical Electrical Characteristics:

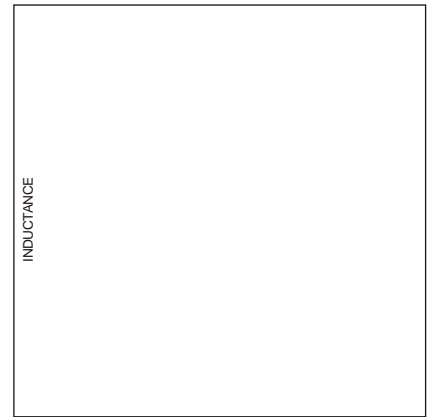

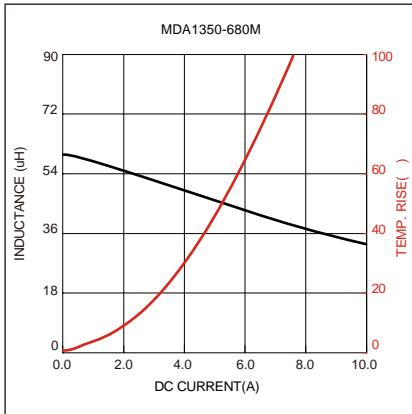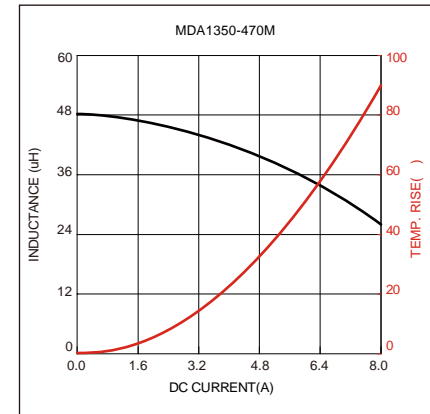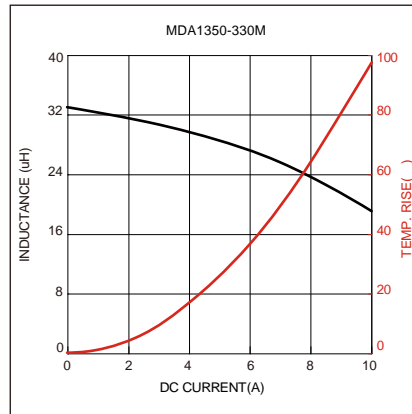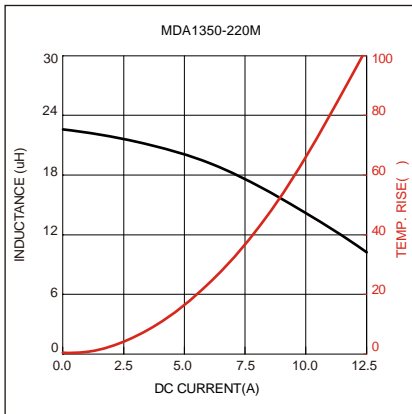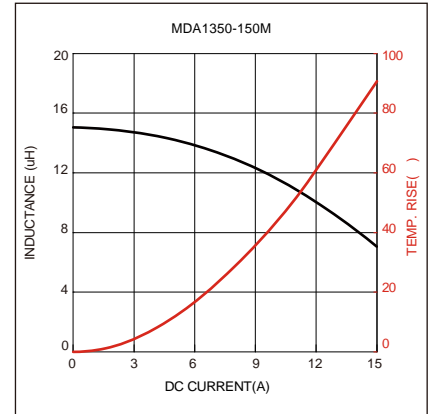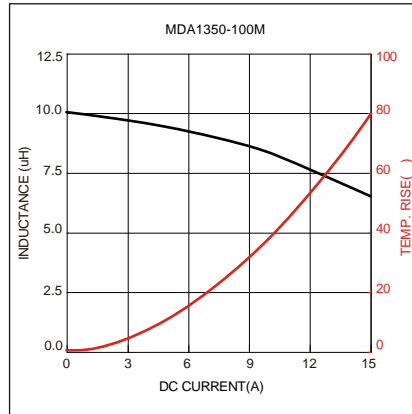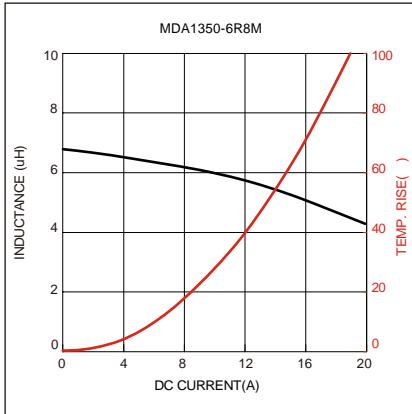

## Soldering Reflow:

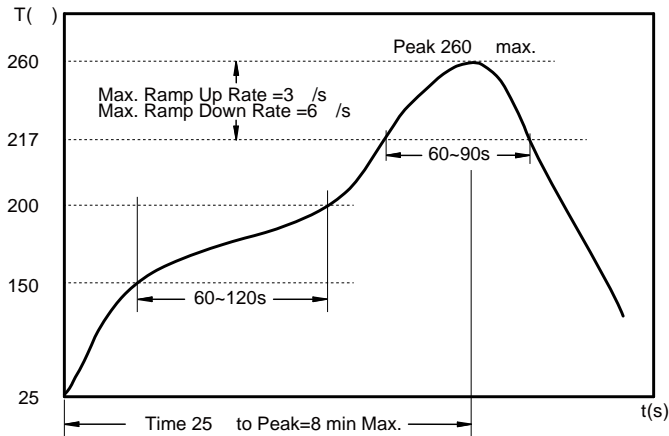

Preheat condition: 150 ~200 / 60~120 sec.

Allowed time above 217 : 60~90 sec.


Max temperature: 260 .

Max time at max temperature: 10 sec.

Allowed Reflow time: 2x max.


## Packaging Information:

### Tape Dimension :

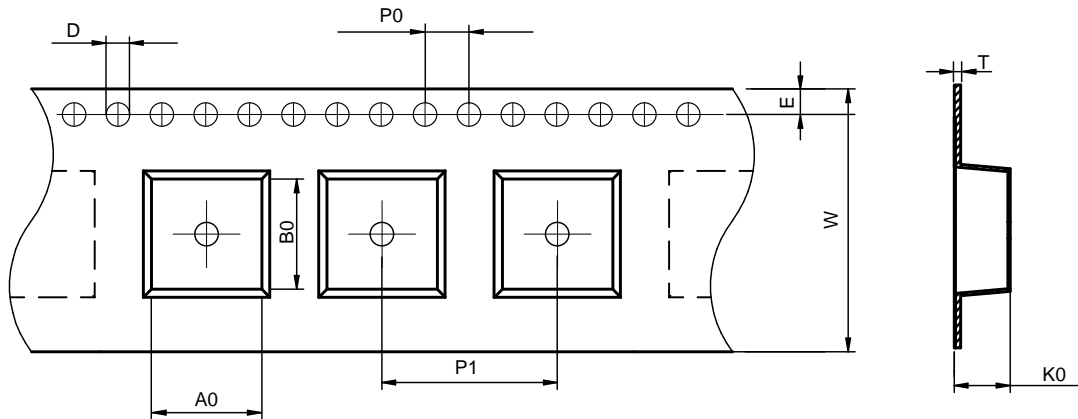

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDA1350	13.1±0.1	14.0±0.1	1.5±0.1	4.0±0.1	16.0±0.1	24.0±0.3	5.4±0.1	1.75±0.1	0.50±0.05

### Peel force of top cover tape:

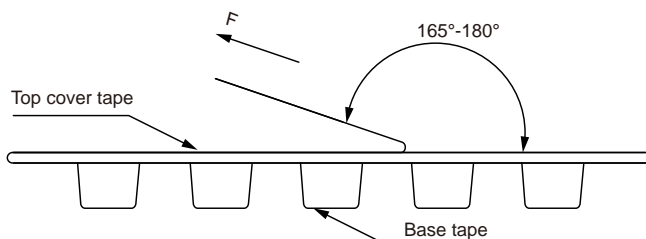

The peel force of top cover tape shall be between 0.1 to 1.3 N

### Product Marking:

Marking	KH+Printing (Inductance+period)

